


# Xerox® AltaLink® Colour Multifunction Printer



C8030/C8035/C8045/C8055/C8070

AltaLink C8000 Series Colour Multifunction Printers are built on Xerox® ConnectKey® Technology. For more information, go to [www.connectkey.com](http://www.connectkey.com).

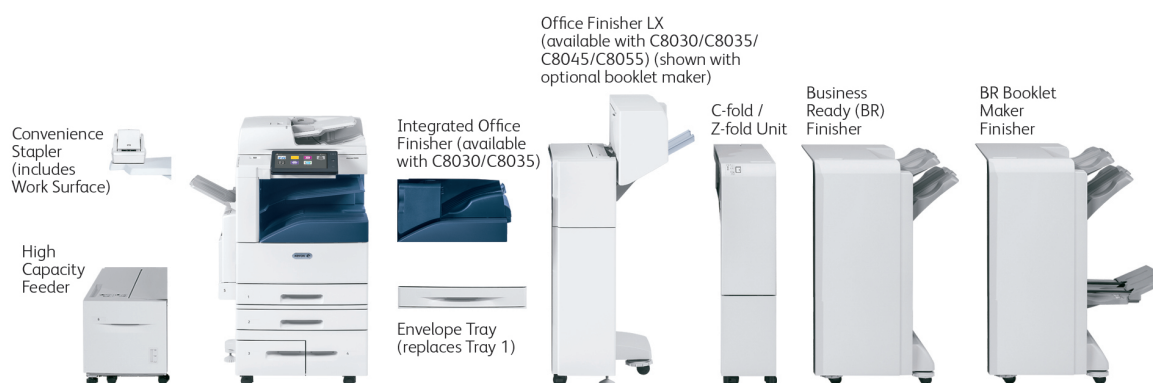

System Specification	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
<b>Speed</b>					
Colour / Black and White	Up to 30 / 30 ppm	Up to 35 / 35 ppm	Up to 45 / 45 ppm	Up to 50 / 55 ppm	Up to 70 / 70 ppm
<b>Monthly Duty Cycle<sup>1</sup></b>	Up to 90,000 pages / month	Up to 110,000 pages / month	Up to 200,000 pages / month	Up to 300,000 pages / month	Up to 300,000 pages / month
<b>Recommended Average Monthly Print Volume<sup>2</sup></b>	5,000 to 12,000 pages	5,000 to 15,000 pages	8,000 to 20,000 pages	8,000 to 22,000 pages	10,000 to 40,000 pages
<b>Hard Drive / Processor / Memory</b>	Minimum 250 GB HDD / Intel® Atom™ Quad Core 1.91 GHz / 2 MB Cache / 8 GB system memory				
<b>Connectivity</b>	Ethernet 10/100/1000 Base-T, High-speed USB 2.0 direct print, Wi-Fi Direct with optional Xerox® USB Wireless Adapter, Near Field Communication (NFC)				
<b>Controller Features</b>	Unified Address Book, Remote Control Panel, Configuration Cloning				
<b>Optional Controller</b>	Xerox® EX-c C8000 Print Server Powered by Fiery®				
<b>Copy and Print</b>					
<b>Copy and Print Resolution</b>	<b>Copy:</b> Up to 600 x 600 dpi; <b>Print:</b> Up to 1200 x 2400 dpi				
<b>First-Print-Out Time colour/black-and-white</b>	As fast as 6.5 / 5.3 seconds	As fast as 6.4 / 5.2 seconds	As fast as 6.5 / 5.3 seconds	As fast as 6.0 / 4.7 seconds	As fast as 4.7 / 4.0 seconds
<b>First-Copy-Out Time</b> (from platen/warmed up state)	As fast as 8.1 seconds / As fast as 6.7 seconds	As fast as 8.1 seconds / As fast as 6.7 seconds	As fast as 7.8 seconds / As fast as 6.4 seconds	As fast as 7.2 seconds / As fast as 5.7 seconds	As fast as 5.2 seconds / As fast as 4.9 seconds
<b>Page Description Language</b>	Adobe® PostScript® 3™, Adobe® PDF version 1.7, PCL® 5c / PCL 6, optional XML Paper Specification (XPS®)				
<b>Print Features</b>	Print from USB, Encrypted Secure Print, Xerox® Earth Smart Driver Settings, Job Identification, Booklet Creation, Store and Recall Driver Settings, Bi-directional Real-time Status, Scaling, Job Monitoring, Application Defaults, Two-sided Printing (as default), Hold All Jobs				
<b>Mobile (Optional)</b>					
<b>Mobile Printing (optional)</b>	Xerox Mobile Print®, Xerox® Mobile Print Cloud, Xerox® Print Management and Mobility Suite				
<b>Mobile Printing Connectivity</b>	Apple® AirPrint®, Mopria® Certified, Mopria® Print Service Plug-in for Android™, @PrintByXerox, Xerox® Print Service Plug-in for Android™				
<b>Mobile Apps and Xerox® App Gallery</b>	Xerox® App Gallery: <b>Cloud Connector Apps:</b> Print and Scan to/from: Google Drive®, Microsoft® OneDrive®, Microsoft Office 365™, DropBox™ and Box® <b>Productivity Apps:</b> Xerox® Easy Translator Service <b>Device Management Apps:</b> QR Code <b>Scan Apps:</b> Xerox® Scanning App for DocuShare® See the full list of apps available in the Xerox® App Gallery at <a href="http://www.xerox.com/appgallery">www.xerox.com/appgallery</a> .				

# Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

Mobile (Optional)					
Xerox® Print Management and Mobility Suite, Xerox® Print Management and Mobility Service	Xerox® Print Management and Mobility Suite is a modular set of workflows designed to save customers time and money by providing effective control over their print fleet, while enabling worker productivity and mobility through a set of robust workflows. Xerox enables ultimate customer flexibility by offering these capabilities in both an on-premises server version and with a cloud based-version of this solution.				
Scan					
Standard Features	Destinations: Scan to USB / Email / Network (FTP/SMB); File Formats: PDF, PDF/A, XPS, JPEG, TIFF; Convenience Features: Scan to Home, Searchable PDF, Single/Multi-Page PDF / XPS / TIFF, Password Protected PDF, Unified Address Book, Optical Character Recognition (OCR)				
Optional Features	ConnectKey® for DocuShare®, other solutions available through various Xerox Business Innovation Partners				
Fax					
Standard Features	Internet Fax, Fax Build Job, Network Server Fax Enablement				
Optional Features	Fax Forward to Email or SMB, Walk-up Fax (one-line and two-line options, includes LAN Fax)				
Security					
Standard Features	McAfee® Embedded, McAfee ePolicy (ePO) Compatible, HDD Overwrite, AES 256-bit Encryption (FIPS 140-2 compliant), SHA-256 Hash Message Authentication, Common Criteria Certification (ISO 15408) (undergoing evaluation), Encrypted Secure Print, Secure Fax, Secure Scan, Secure Email, Network Authentication, TLS, SNMPv3, Audit Log, Access Controls, User Permissions				
Optional Features	McAfee Integrity Control, Smart Card Enablement Kit (CAC/PIV/.NET), Xerox® Integrated RFID Card Reader E1.0				
Accounting					
Standard Features	Xerox® Standard Accounting (Copy, Print, Scan, Fax, Email), Network Accounting Enablement				
Optional Features	Equitrac®, YSoft® Papercut®, other network accounting solutions available through various Xerox Business Innovation Partners				
Device Specification					
Control Panel Languages	US English, International English, International French, Italian, German, International Spanish, Dutch, Brazilian Portuguese, Swedish, Norwegian, Danish, Finnish, Turkish, Greek, Russian, Czech, Polish, Hungarian, Romanian, Catalan, Arabic				
Accessories					
Optional	High Capacity Feeder (HCF) Envelope Tray (Replaces Tray 1) Horizontal Transport Kit BR Finisher (requires Horizontal Transport Kit) (optional with C8030, C8035, C8045, C8055, C8070) BR Booklet Maker Finisher (requires Horizontal Transport Kit) (optional with C8030, C8035, C8045, C8055, C8070) C-fold / Z-fold Unit for BR Finisher or BR Booklet Maker Finisher Convenience Stapler (includes Work Surface) Integrated Office Finisher (optional with C8030, C8035) Office Finisher LX (optional with C8030, C8035, C8045, C8055) Booklet Maker for Office Finisher LX Hole Punch for Office Finisher LX Smart Card Enablement Kit EFI™ Fiery® Integrated Network Server Walk up Fax (One- or Two-line options, includes LAN Fax) Wi-Fi Direct with Optional Xerox® USB Wireless Adapter McAfee® Integrity Control Enablement Kit Keyboard Kit (Wired/USB) XPS Print Option Kit³				
Foreign Device Interface (FDI)	Also known as Auxiliary Access Device, this is an interface to third party access control devices, such as coin machines and card readers.				
Electrical Requirements	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
North America	Voltage: 110-127 VAC +/- 10% Frequency: 50/60 Hz +/- 3%, 15 A				Voltage: 110-127 VAC +/- 10% Frequency: 50/60 Hz +/- 3%, 20 A
Europe	Voltage: 220-240 VAC +/- 10% Frequency: 50/60 Hz +/- 3%, 10 A				Voltage: 220-240 VAC +/- 10% Frequency: 50/60 Hz +/- 3%, 20 A
Power Consumption	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
Running (Average)	110V: 653 watts 220V: 667 watts	110V: 687 watts 220V: 699 watts	110V: 740 watts 220V: 761 watts	110V: 787 watts 220V: 810 watts	110V: 942 watts 220V: 972 watts
Standby Mode	110V: 63 watts 220V: 61.5 watts	110V: 64 watts 220V: 61.6 watts	110V: 70.9 watts 220V: 70.5 watts	110V: 94.9 watts 220V: 81.5 watts	110V: 84.6 watts 220V: 81.6 watts
Low Power Mode	110V: 60 watts 220V: 57.7 watts	110V: 59.6 watts 220V: 57.3 watts	110V: 62.7 watts 220V: 60.2 watts	110V: 61.8 watts 220V: 60.3 watts	110V: 79.3 watts 220V: 76.9 watts
Auto Off/Sleep Mode	110V: 3.53 watts 220V: 3.84 watts (Default time to sleep mode = 2 minutes)	110V: 3.54 watts 220V: 3.78 watts (Default time to sleep mode = 2 minutes)	110V: 3.78 watts 220V: 3.63 watts (Default time to sleep mode = 2 minutes)	110V: 3.34 watts 220V: 3.49 watts (Default time to sleep mode = 2 minutes)	110V: 3.59 watts 220V: 3.85 watts (Default time to sleep mode = 2 minutes)

## Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

Power Consumption	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
Warm-up (from Off)	As fast as 92 seconds				
Recovery from Low Power	As fast as 2 seconds				
Recovery from Sleep	As fast as 6.2 seconds				
Operating Environment					
Required Temperature Range	50 to 82° F / 10 to 28° C				
Required Relative Humidity	15% to 85%				
Sound Power Levels	Operating: 63.9 dB(A) Standby: 3.32 dB(A)		Operating: 68.3 dB(A) Standby: 3.35 dB(A)		Operating: 71.3 dB(A) Standby: 3.31 dB(A)
Dimensions and Weight					
Base Configuration	Width: 25.2 in. / 640 mm Depth: 28.9 in. / 723.8 mm Height: 45 in. / 1,142.7 mm Weight: 321 lb. / 151.9 kg				
With Integrated Office Finisher ( C8030, C8035)	Width: 26 in. / 662.6 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 348 lb. / 158 kg				
With Office Finisher LX (with Booklet Maker)	Width: 46.5 in. / 1,182 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 390 lb. / 177.2 kg				
Base Configuration with Business Ready (BR) Finisher	Width: 50.3 in. / 1,277 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 430.4 lb. / 195.3 kg				
Base Configuration with BR Booklet Maker Finisher	Width: 56.3 in. / 1,429.2 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 467.1 lb. / 212.3 kg				
Base Configuration with BR Booklet Maker Finisher and C-fold / Z-fold Unit	Width: 65.5 in. / 1,664.2 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 581.7 lb. / 264.4 kg				
Base Configuration with BR Booklet Maker Finisher, C-fold / Z-fold Unit and High Capacity Feeder	Width: 77.9 in. / 1,978.2 mm Depth: 28.9 in. / 732.8 mm Height: 45 in. / 1,142.7 mm Weight: 645.5 lb. / 293.4 kg				

# Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

System Certification/Regulatory Compliance					
Certifications	FCC Class A Compliant (US), ICES Class A Compliant (Canada) TUV Listed to “UL60950-1, Second Edition” TUV Certified to “CSA 22.2 No. 60950-1-07, Second Edition” CB Certified (IEC 60950-1, Second Edition) CE Mark ENERGY STAR® EPEAT (United States) EAC Wi-Fi Direct Certification WIFI Blue Angel GS Mark Genoa Bonjour Adobe PS FIPS140-2 Open SSL WI-Fi Alliance McAfee Section 508 Env. Choice (Canada) Citrix® Certified MEDITECH Mopria® Cert.* WHQL* Cerner* Ukrainian Cert.* IPv6 Ready* NOM cert. (Mexico)* BIS (India)* EAC (Russia)* SAP* Google cloud print* Common Criteria (IEEE 2600.2 standard) (undergoing evaluation) *In progress, refer to latest on-line product specifications document at <a href="http://www.xerox.com/AltalinkC8000Specs">www.xerox.com/AltalinkC8000Specs</a>				
Paper Handling	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
Single-pass Duplex Automatic Document Feeder (DADF)					
Capacity <sup>4</sup>	130 sheets				
Speed	Up to 80 pages per minute black-and-white and colour (simplex) Up to 139 images per minute (ipm) black-and-white and colour (duplex)				
Paper Sizes Sensed	3.4 x 4.9 in. to 11.7 x 17 in. / 85 x 125 mm to 297 x 431.8 mm				
Weights	16 to 32 lb. bond / 60 to 128 gsm				
Bypass Tray					
Capacity <sup>4</sup>	100 sheets				
Sizes	Custom Sizes: 3.5 x 3.9 in. to 12.6 x 19 in. / 89 x 98 mm to 320 x 483 mm				
Weights	16 lb. bond to 110 lb. cover / 60 to 300 gsm				
Media Types	Bond Card Stock Card Stock Reloaded Custom Envelopes Glossy Card Stock Glossy Card Stock Reloaded Heavyweight Card Stock Heavyweight Card Stock Reloaded Heavyweight Glossy Card Stock Heavyweight Glossy Card Stock Reloaded Hole punched Labels Letterhead Lightweight Lightweight Cardstock Lightweight Card Stock Reloaded Lightweight Glossy Card Stock Lightweight Glossy Card Stock Reloaded Plain Plain-Reloaded Preprinted Recycled Transparencies				
Trays 1 and 2 (Common to both tray configurations below)					
Capacity <sup>4</sup>	520 sheets each				

## Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

Trays 1 and 2 (Common to both tray configurations below)	
<b>Sizes</b>	Tray 1: Custom Sizes: 5.5 x 7.2 in. to 11.7 x 17 in. / 140 x 182 mm to 297 x 432 mm short edge feed (SEF) Tray 2: Custom Sizes: 5.5 x 7.2 in. to 12 x 18 in. / 140 x 182 mm to SRA3 (SEF)
<b>Weights</b>	16 bond to 140 lb. index / 60 to 256 gsm
<b>Media Types</b>	Bond Card Stock Card Stock Reloaded Custom Envelopes Glossy Card Stock Glossy Card Stock Reloaded Heavyweight Card Stock Heavyweight Card Stock Reloaded Heavyweight Glossy Card Stock Heavyweight Glossy Card Stock Reloaded Hole punched Labels Letterhead Lightweight Lightweight Cardstock Lightweight Card Stock Reloaded Lightweight Glossy Card Stock Lightweight Glossy Card Stock Reloaded Plain Plain-Reloaded Preprinted Recycled Transparencies
Four Tray Configuration (Trays 3 and 4) (Available on C8030/C8035)	
<b>Capacity<sup>4</sup></b>	Tray 3: 520 sheets Tray 4: 520 sheets
<b>Sizes</b>	Trays 3 and 4: 5.5 x 7.2 in. to 12 x 18 in. / 140 x 182 mm to SRA3 mm (SEF)
<b>Weights</b>	16 bond to 140 lb. index / 60 to 256 gsm
<b>Media Types</b>	Bond Card Stock Card Stock Reloaded Custom Envelopes Glossy Card Stock Glossy Card Stock Reloaded Heavyweight Card Stock Heavyweight Card Stock Reloaded Heavyweight Glossy Card Stock Heavyweight Glossy Card Stock Reloaded Hole punched Labels Letterhead Lightweight Lightweight Cardstock Lightweight Card Stock Reloaded Lightweight Glossy Card Stock Lightweight Glossy Card Stock Reloaded Plain Plain-Reloaded Preprinted Recycled Transparencies
High Capacity Tandem Tray (Available for all speeds)	
<b>Capacity<sup>4</sup></b>	Tray 3: 867 sheets Tray 4: 1,133 sheets
<b>Sizes</b>	8.5 x 11 in. / A4, JIS B5, Executive (7.25 x 10.5 in) LEF
<b>Weights</b>	16 bond to 140 lb. index / 60 to 256 gsm
<b>Media Types</b>	Bond Card Stock Custom Glossy Card Stock Hole punched Labels Letterhead Lightweight Cardstock Lightweight Glossy Card Stock Plain Preprinted

# Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

Envelope Tray (Optional - Replaces Tray 1)					
Capacity <sup>4</sup>	Up to 60 envelopes				
Sizes	#10 Commercial (9.25 x 4.125 in.) / Monarch, DL, C5 Custom Sizes: 3.9 x 5.8 in. to 6.4 x 9.5 in. / 98 x 148 mm to 162 x 241 mm				
Weights	20 to 24 lb. bond / 75 to 90 gsm				
High Capacity Feeder (HCF) (Optional with all models)					
Capacity <sup>4</sup>	2,000 sheets				
Sizes	Standard Sizes: 8.5 x 11 in. or 7.25 x 10.5 in. / A4 or B5 LEF				
Weights	16 bond to 140 lb. index / 55 to 256 gsm				
Total Capacity					
Device Total Capacity <sup>4</sup>	Four Tray Module: 2,180 sheets Four Tray Module with High Capacity Feeder: 4,180 sheets High Capacity Tandem Tray Module: 3,140 sheets High Capacity Tandem Tray Module with High Capacity Feeder: 5,140 sheets				
Finishing	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
Dual Offset Catch Tray (Replaced by Integrated Finisher. Becomes Single Catch Tray with Office Finisher and Business Ready Finishers)					
Stacking Tray Capacity <sup>4</sup>	Dual Offset Catch Tray - Up to 250 sheets each Left Side Face up Tray - Up to 100 sheets				
Integrated Office Finisher (Optional with C8030/C8035)					
Stacking Tray	500 sheets of 20 lb. bond / 80 gsm – 8.5 x 11 in. / A4 or 250 sheets of 20 lb. bond / 80 gsm – 11 x 17 in. / A3				
Sizes	3.5 x 3.9 in. to 11.7 x 17 in. / 89 x 98 mm to 297 x 432 mm				
Weights	16 lb. bond to 80 lb. cover / 60 to 256 gsm				
Stapling	Single Auto-Stapling: 50 sheets maximum: Letter / A4 / B5 size sheets (less than 90 gsm or (2) 220 gsm covers) 30 sheets maximum: Legal / Tabloid / A3 / B4 size sheets (less than 90 gsm or (2) 220 gsm covers)				
Office Finisher LX (Optional with C8030/C8035/C8045/C8055) (Horizontal Transport Module included)					
Stacking Tray Capacity <sup>4</sup>	2,000 sheets unstapled or 1,000 sheets single stapled or 750 sheets dual stapled (8.5 x 11 in. / A4)				
Stacking Tray Sizes	8.3 x 7.2 in. to 11.7 x 17 in. / 210 x 182 mm to 297 x 432 mm				
Weights	16 lb. bond to 80 lb. cover / 60 to 256 gsm				
Multiposition Stapling	50 sheets of 24 lb. bond / 90 gsm				
Hole Punch (Optional)	North America 2-3 Hole Punch Europe 2-4 Hole Punch				
Booklet Maker for Office Finisher LX (Score/Crease, Saddle-stitch Staple) (Optional)					
Top Tray Capacity <sup>4</sup>	40 booklets (2-15 sheets per booklet – 20 lb. / 80 gsm or less)				
Sizes	Letter – 8.5 x 11 in. / A4 SEF Legal – 8.5 x 14 in. / B4 SEF Ledger – 11 x 17 in. / A3 SEF				
Saddle-Stitch Stapling	2-15 sheets / 8-60 page booklet 16 to 24 lb. bond / 60 x 90 gsm				
Score / Crease	1-15 sheets / unstapled				
Optional Business Ready (BR) Finisher (Requires Horizontal Transport Kit)					
Capacity <sup>4</sup>	Offsetting Top Tray: 500 sheets Stacking Stapling Tray: 3,000 sheets unstapled or 100 sets (dual or 4-position stapling) 11 x 17 in., 8.5 x 14 in. / A3 or 200 sets (single-position staple) 8.5 x 11 in. / A4				
Sizes	7.25 x 10.5 in. to 12 x 19 in. / B5 to A3 for stacking 7.25 x 10.5 in. to 11 x 17 in. / B5 to A3 for stapling				
Weights	16 bond to 110 lb. cover / 60 to 300 gsm (coated and uncoated)				
Stapling	Single and multiposition stapling Auto stapling (50 sheets maximum) – 24 lb. / 90 gsm Letter, Legal, Tabloid, A3, A4, B4 and B5 sizes supported				
Hole Punch	North America 2-3-hole punch Europe 2-4-hole punch 4-hole “Swedish” punch (optional)				

# Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

Optional BR Booklet Maker Finisher (Requires Horizontal Transport Kit)					
Capacity <sup>4</sup>	Offsetting Top Tray: 500 sheets of 8.5 x 11 in. / A4 unstapled Stacking Stapling Tray: 1,500 sheets of 8.5 x 11 in. / 11 x 17 in. / A4 / A3 unstapled or 200 stapled sets of 8.5 x 11 in. / A4 (single-position stapling or dual or 4-position stapling) or 100 stapled sets of 11 x 17 in. / A3				
Sizes	4 x 6 in. to 11 x 17 in. / A6 to A3 for stacking 7.25 x 10.5 in. to 11 x 17 in. / B5 to A3 for stapling				
Weights	16 bond to 110 lb. cover / 60 to 300 gsm (coated and uncoated)				
Stapling	Single and multiposition stapling Auto stapling (50 sheets maximum) – 24 lb. / 90 gsm Letter, Legal, Tabloid, A3, A4, B4 and B5 sizes supported				
Hole Punch North America Europe	2-3-hole punch 2-4-hole punch 4-hole “Swedish” punch (optional)				
Booklet Maker	Saddle-stitch 2 to 16 sheets (7 sheets at 106 to 176 gsm coated or 5 sheets at 177 to 220 gsm coated) Bi-fold up to 5 sheets Letter, Legal, Tabloid, A3, A4 supported				
C-fold / Z-fold Unit (Optional with BR Finisher and BR Booklet Maker Finisher)					
Types	C-fold, Z-fold and Z-half-fold				
Capacity <sup>4</sup>	40 sheets				
Sizes	C-fold and Z-fold: Letter – 8.5 x 11 in. / A4 SEF only Z-half-fold: Tabloid – 11 x 17 in. / A3 only				
Weights	16 to 24 lb. bond / 64 to 90 gsm				
Output Trays	Envelope Tray: C-fold, Z-fold and Tri-fold Stacker Tray or Top Tray: Z-half-fold				
Convenience Stapler (Optional - Requires Optional Work Surface)					
Capacity <sup>4</sup>	50-sheet stapling 5,000 staples Requires separate power outlet				
Copy	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
First-Copy-Out Time (from platen/warmed up Colour / Black and White)	As fast as 8.1 seconds / As fast as 6.7 seconds	As fast as As fast as 8.1 seconds / As fast as 6.7 seconds	As fast as As fast as 7.8 seconds / As fast as 6.4 seconds	As fast as As fast as 7.2 seconds / As fast as 5.7 seconds	As fast as As fast as 5.2 seconds / As fast as 4.9 seconds
Sides (input:output)	1-1, 1-2, 2-2, 2-1				
Quantity	1 to 9,999				
Resolution(max)	Up to 600 x 600 dpi				
Reduction/Enlargement	Variable zoom from 25 % to 400 % in 1 % increments				
Concurrency	Program-ahead to allow job to be initiated while initial job is processed (Copy, Print, Fax and Scan)				
Copy Features	Annotation and Bates™ stamping (with colour capability and font size adjustment) Authentication for Services (i.e. Colour Copy) Auto Paper Select Auto Reduction & Enlargement to fit selected paper size Auto Tray Switching Automatic 2-sided / Duplex Booklet Creation Build Job: (Enables page-level programming and also lets you proof each section or delete last section as the job is built) Collation Covers (Front only, front and back, back only, printed inside and out: Blank or Printed) Dividers (blank) Edge Erase Features Help (Intuitive text and graphic descriptions) ID Card Copy Image Quality Adjustments Image Shift (with Auto Center option) Invert Image (negative or mirror image) Large Job Interrupt Multi-up (up to 15 columns by 15 rows) Sample Set Save Job Settings Single Colour Stapling Transparencies				
Xerox® Copier Assistant®	Xerox® Copier Assistant® Software provides a PC-based alternative to the user interface touchscreen. Used in conjunction with a customer-supplied PC attached via the USB port, this software supports text-to-speech, screen magnification and easy PC keyboard access to basic and advanced copy features. Section 508-compliant. For more information or to download Xerox® Copier Assistant for free, visit <a href="http://www.xerox.com">www.xerox.com</a> .				

# Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

Print	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
Resolution	Up to 1200 x 2400 dpi				
Print Features	Application Defaults Banner Sheet Enable / Disable Custom Colour Options (Colour By Words) Bi-directional Real-time Status Cover Selection Delay Print (specific time) User Permissions Image Options (Toner Saver, Resolution (Standard, Enhanced, High) Job Identification (Print ID or Banner, Print ID in margins on first page only or all pages) LAN Fax (requires optional Fax Kit) Layout / Watermark N-up (up to 16 pages per sheet) Booklet layout Finishing Fit to new paper size Hold All Jobs Paper Selection by Attribute Sample Set Saved Job (colour jobs can be printed as monochrome) Secure Print with Timed Deletion Special Pages (exception page programming: covers, inserts, exception pages) Store and Recall Driver Settings Sustainability Features (Xerox® Earth Smart Settings, Duplex, N-up, Turn-off Banner and Print ID, Smart Sample Set, Hold All Jobs) Two-sided Printing (as default)				
Print from USB	Allows walk-up printing from Type A USB port on front panel Supports direct printing from computer via Type B USB port Supported file formats: PDF, JPEG, TIFF, PS, XPS, PCL Colour jobs can be printed as black-and-white				
Operating Systems	Microsoft® Windows® XP SP3 (32- and 64-bit) Windows Server 2003 SP2 R2 (32- and 64-bit) Windows Server 2008 and R2 (32- and 64-bit) Windows Server 2012 and R2 (64-bit) Windows Vista SP2 (32- and 64-bit) Windows 7 (32- and 64-bit) Windows 8 (32- and 64-bit) Windows 8.1 (32- and 64-bit) Windows 10 (32- and 64-bit) Mac OS 10.8, 10.9, 10.10, 10.11 Linux® Redhat® Fedora® Core 20 x86 Ubuntu® 14.04 x64 openSUSE® 13.1 x64				
Network Protocols	TCP/IP: HTTP/HTTPS, Internet Printing Protocol, LPR/LPD, Raw Socket Printing/Port 9100, IPv4/IPv6, WSD Microsoft Windows Networking over IP Bonjour® / AirPrint® IPv6 Secure FTP Most protocols not in use can be disabled				
Administrative Protocols	DHCP, SNMP, WINS, SLP® v2, HTTP, HTTPS, DHCP Autonet, TLS, NTP, MDNS				
Font Capability	PCL: 93 scalable fonts, line printer and bitmap font (including Cyrillic font support) PostScript 3: 173 Type 1 fonts, 2 Multiple Master fonts				
Xerox® Mobile Express Driver®	Makes it easy for mobile users to find, use and manage Xerox® and non-Xerox® devices in every new location. Plug into a new network, and Mobile Express Driver automatically discovers available printers and provides status and capability information. Save a list of “favorite” printers for each location, store application print settings for use on any printer in any network, and greatly reduce mobile support calls to IT.				
Xerox® Global Print Driver®	A truly universal print driver that lets IT administrators install, upgrade and manage Xerox® and non-Xerox® devices from a single driver. It provides a consistent, easy-to-use interface for end-users, reducing the number of support calls, and simplifying print services management.				
Xerox® Pull Print Driver	Makes it easy for IT managers to qualify, deploy and manage all print devices using a single driver in a Pull Print environment. Uses a single queue and single driver. The Xerox® Pull Print Driver extends convenience across a broad range of printing assets. IT administrators no longer need to manage and configure multiple drivers. Used in conjunction with Equitrac Office®, Ysoft® SafeQ®, Pharos® and others.				
Unified Address Book for Fax, Internet Fax, Email and Scan to...					
Features	Services supported: Fax, Internet Fax, Email, Scan to Maximum contacts: 5,000 Contacts: Supports 1 or more destinations Favorites for quick access of all services supported				
Scan	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
Concurrency	Scan while the system is printing, copying, or while it is transferring scan to network or fax jobs (priority is for return of scanned originals and printing concurrent jobs)				
Input Speed	Up to 80 page per minute black-and-white and colour (simplex) Up to 139 images per minute (ipm) black-and-white and colour (duplex)				
Resolution	72 x 72 dpi to 600 x 600 dpi				
Bit Depth	1-bit (black-and-white), 8-bit (greyscale), 24-bit (colour)				



# Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

Scan	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
Maximum Scan Area	11 x 17 in. / A3				
Scan Template Management	Support 250 scan templates Create Xerox® CentreWare® IS scan templates and share via device cloning to other multifunction printers Confirmation sheet options				
Network Protocols	sFTP, FTP, SMB, HTTP, HTTPS				
File Compression	Colour TIFF (TIFF 6.0 or TTN2 with JPEG, LZW) Black-and-white TIFF (G3MH, G4 MMR compression - single or multiple pages) Searchable PDF/OCR and PDF/A-1b (MRC, JPEG, G3 MH, G4 MMR, JBIG 2 Huffman, JBIG Arithmetic Compression, Deflate (for Black-and-white and within MRC)) Linearised PDF / PDF/A				
Document Management Fields (Metadata)	Features only available in Network Scan to File Templates: <ul style="list-style-type: none"><li>• 1 to 6 user programmable metadata fields per network scan to file templates and unlimited fields within the template – Metadata field consists of field name, default value and other configurations</li><li>• Customised fields viewed on user interface for variable data input</li></ul>				
Scan Features	Mixed Size Originals Scan Build Job Compression Quality/File Size Control Original Type (Photo and Text, Photo, Text, Map, Newspaper / Magazine) Auto Background and Shadow Suppression Size for Size (for mixed size originals) TWAIN Support / WIA 2.0 Support Bound Originals Edge Erase Reduction/Enlargement Single Touch Scan buttons (up to 10)				
Scan to Email (Standard)					
Scan Features	<ul style="list-style-type: none"><li>• Email signatures (6 lines each of 128 character max), email message body (user configurable), email CentreWare IS confirmation sheet options</li><li>• Scan to Email S/MIME Encryption</li><li>• Email signing (requires Smart Card option)</li><li>• Auto send to self</li></ul>				
Directory Access	Address list via LDAP (Windows Active Directory, Exchange, Notes, Domino) Device Address Book				
Scan to... (Standard)					
Features	Scan to USB Scan to Network Folder (uses Unified Address Book entries) Scan to Home Scan to USB Scan to Network Scan to Email				
Workflow Scanning (Optional)					
Scanning Software	Autostore v7 ecopy ShareScan v5.2 eCopy ScanStation v5.2				
Scanning Apps and Xerox® App Gallery	Scan to/from: Dropbox™, Google Drive™, Microsoft® OneDrive®, Microsoft Office 365™ and Box® See the full list of apps available in the App Gallery: <a href="http://www.xerox.com/appgallery">www.xerox.com/appgallery</a> .				
Security	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
Features	<ul style="list-style-type: none"><li>• Expanded Authentication<ul style="list-style-type: none"><li>- Network authentication to access device and/or device services via- Kerberos (UNIX / Windows Server 2003 / Windows Server 2008), SMB (Windows Server 2003 / Windows Server 2008, Windows server 2012), NDS, LDAP authentication</li><li>- Local Authentication (internal database)</li><li>- Smart Card authentication -144k CAC / PIV Card Support (2048 bit certificate key) / .NET</li><li>- Secure Data</li><li>- Digitally signed PDF (when using Smart Card authentication)</li><li>- Encrypted and authentication to SMTP server for Scan to Email</li><li>- Encrypted / Password Protected PDF (when using Email and Network Scan Templates only)</li><li>- Secure Print (up to 10 digit PIN or Network Authentication)</li><li>- Immediate Image Overwrite / Securely delete jobs using approved algorithms</li><li>- On Demand Image Overwrite (Scheduled, Manual), includes sanitation of unused area of disk</li><li>- FIPS 140-2 256 bit Hard Disk Encryption, TLS, IPPS, HTTPS, SFTP, SNMPv3</li></ul></li><li>• Expanded Authorisation<ul style="list-style-type: none"><li>- SA access based on network credentials</li><li>- Authorisation per user per service</li><li>- User Permissions required to access Print and Print Features (e.g. colour access, or time restrictions) reflects in the print driver</li><li>- Secure Network Access</li></ul></li><li>• IP Filter, IPsec, IPv6, TLS v1.0, v1.2, SNMPv3, HTTPS, 802.1X, SFTP</li><li>- McAfee® Embedded Security, Port disablement including USB ports, Audit Log, Hide Print Job Names, McAfee Integrity Control (optional)</li><li>• Common Criteria Certification ISO 15408 (undergoing evaluation)</li></ul>				
Xerox® Integrated RFID Card Reader E1.0 (Optional kit)	Integrated support for most industry security cards providing additional security; with embedded multifunction printer card readers in the multifunction printer panel.				

# Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

Fax	AltaLink C8030	AltaLink C8035	AltaLink C8045	AltaLink C8055	AltaLink C8070
Network Server Fax Features					
Compatibility	ITU (CCITT) group 3; Various Xerox Business Innovation Partner Solutions				
Maximum Scan Area	11 x 17 in. / A3				
Fax Send Features	One- or Two-sided Scanning (up to 11 x 17 in. / A3) Add to Send List (50 numbers maximum) Build Job, Favorites, Delay Send (specific time) Original Type (photo, text or photo and text)				
Fax Print Features	One- or Two-sided Printing, Staple, Secure Print				
Transmission Resolution	Superfine: 400 x 200 dpi (Scan at 600 x 600 dpi) Fine: 200 x 200 dpi Standard: 200 x 100 dpi				
Internet Fax Features					
Compatibility	Direct print-ready document transmission to remote Internet Fax machines or email clients (SMTP) Reception and automatic printout of documents sent via email from remote Internet Fax machines or email clients				
Directory Access	Utilises the Unified Address Book				
Send/Receive	Multi-page TIFF, Image only PDF				
Resolution	72 x 72 dpi to 600 x 600 dpi Bit Depth: 1-bit (black-and-white)				
Network Protocols	SMTP (send), POP3 (receive)				
Compliance	ITU-T T.37 compliant				
Walk-up Fax Features (Customer-installable) – 1 and 2 lines					
Compatibility	ITU (CCITT) Group 3				
Speed / Modems	One or Two V.34 modems: 33,600 bps. Less than 4 seconds per page transmission time ATA analog terminal adapter utilising T38 (optional)				
Compression / Speed	MH/G3, MMR/SG3				
Resolution	<b>Walkup Send:</b> Standard: 200 x 100 dpi Fine: 200 x 200 dpi Superfine: 600 x 600 dpi <b>Receive:</b> Accepts all sizes				
Fax Send Features	LAN Fax (fax from print driver) Auto Fax Transmission Reduction Page-by-page Job Status at the Machine Delay Start, Build Job, Favorites Automatic Memory Resend Automatic Cover Sheets PSTN Fax Batch Send (up to memory capacity)				
Fax Receive Features	One- or Two-sided Printing Stapled or Unstapled Receive Print Mode – Manual (size, margin, stock, header) / Auto Output Tray Selection Up to 200 Password Protected Mailboxes Secure Receive Receive Timestamp Auto Answer Delay				
Fax Forward	Forward to Email or SMB Location Fax Forward on Receive Only				
Fax Reports	Activity, Dial Directory, Group Directory, Transmission Confirmation, Pending Fax, Options Report, On Demand Overwrite Report, Mailbox Report, Broadcast Report				
Directory Access	Utilises the Unified Address Book Group fax available				
Auto Redial	Up to 14 attempts (per country requirements) 1 to 25 minute intervals				
Auto Resend	Up to 5 attempts				
Device Management					
Management Support	SNMP Version 1, SNMP Version 2c and SNMP Version 3 trap over TCP/IP and IP MIB access (IETF-MIBII RFC 1213), Host Resources MIB RFC 2790, Printer MIB RFC 1759 v.2				

# Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

Device Management	
<b>Xerox® CentreWare® Web</b>	<p>A Web-based server application for network administrators that permits Web browser-based device management from any workstation, whether running Windows, UNIX or any other operating system:</p> <ul style="list-style-type: none"> <li>• Works with any SNMP-managed printer from any manufacturer.</li> <li>• Provides help with device discovery and installation, health checks and troubleshooting, and device upgrades, as well as basic accounting and asset management.</li> <li>• Requires Windows 8, Vista, Server 2009, Server 2012 or Windows 7 and Internet Explorer 8.x and higher.</li> <li>• CentreWare Integration available for Tivoli® NetView®, Unicenter TNG®, Microsoft Management Console (MMC), HP® OpenView®</li> </ul>
<b>Novell NDPS/NEPS</b>	Server gateway application: centralized management tool.
<b>Xerox® Device Manager</b>	<p>Xerox® Device Manager collects and manages the data that drives fact-based decisions for your enterprise device management environment. It is a single tool to install print queues and configure, manage, monitor and report on both networked and locally connected devices – regardless of vendor – across your enterprise. Xerox® Device Manager provides:</p> <ul style="list-style-type: none"> <li>• Device monitoring and troubleshooting</li> <li>• Extensive reporting and discovery of new devices</li> <li>• Usage collection, chargeback and billing capabilities</li> </ul>
<b>Xerox® Device Types for SAP Environment</b>	<p>Xerox, together with SAP through our Gold-level membership in the SAP Printer Vendor Program, provides seamless connectivity between SAP systems and your Xerox® printers and multifunction printers. As an SAP customer you benefit from having SAP-certified Xerox® device types available right from SAP's online delivery model. SAP-certified device types for Xerox® printers and multifunction printers are available to download.</p> <p><a href="http://www.office.xerox.com/software-solutions">www.office.xerox.com/software-solutions</a></p>
<b>Xerox® Device Types for SAP R/3 Intelligent Barcode Utility (optional)</b>	<p>Provides built-in process intelligence that allows the printing of barcodes on any appropriately configured PostScript printer in specific versions of SAP environment and within Latin-1 (ISO8859-1) SAP system code pages only. Used in conjunction with Xerox® PostScript Device Types for SAP environment and Xerox® Font Center Barcode Fonts. Information available at <a href="http://www.office.xerox.com/software-solutions">www.office.xerox.com/software-solutions</a></p>
<b>Xerox® Barcode Pro PS (optional)</b>	<p>Enables intelligent PostScript printing on Xerox® multifunction printers by storing Xerox® software, as well as, the barcode fonts on the printer hard disk. Enables the printing of barcodes from any application (SAP client or mainframe) that supports PostScript printing. Information available at <a href="http://www.office.xerox.com/software-solutions">www.office.xerox.com/software-solutions</a></p>
Xerox® Embedded Web Server - Integrated Device Web Pages Provided by the Device	
<b>Device Status</b>	<p>Web server embedded in Network Controller:</p> <ul style="list-style-type: none"> <li>• Tray status/contents</li> <li>• Consumables status</li> <li>• Alerts</li> </ul> <p>Remote Control Panel</p>
<b>Job Submission</b>	<p>Print ready files: PS, PCL, TIFF, PDF, JPG, XPS, TXT, PRN</p> <p>Output feature selection (2-sided, output colour, collate, orientation, staple, hole punch, folding, output destination)</p> <p>Delivery options (Immediate, sample set, delay and secure, Save job or reprint)</p>
<b>Device Administration</b>	Allows simple, remote installation setting of configuration options and management of the device
<b>Browsers</b>	<p>Internet Explorer 10.x, 11.x</p> <p>Safari 8.x, 9.x, 10.x</p> <p>Mozilla Firefox 35.x through 51.x</p> <p>Opera 27.x through 41.x</p> <p>Chrome 4.0x through 56.x</p>
<b>Support</b>	Install print / scan drivers and online support available via web page
<b>Languages Supported</b>	International English, International French, Italian, German, International Spanish, Dutch, Brazilian Portuguese, Swedish, Norwegian, Danish, Finnish, Russian, Simplified Chinese, Korean, Japanese, Arabic
Remote Services	
<b>Xerox® MeterAssistant® Service</b>	Automates the process of collecting and submitting meter reads for tracking and billing of Xerox® device usage. Eliminates the need for time-consuming end-user involvement and ensures that meter reads are submitted to Xerox on time.
<b>Xerox® SuppliesAssistant® Service</b>	Automatically orders supplies for Xerox® output devices based on actual usage, eliminating the need to manually manage supplies inventory.
<b>MaintenanceAssistant</b>	Offers a fast (and free) way to resolve potential issues and receive assistance and automate the troubleshooting/repair process. Diagnostic data is sent to Xerox®, allowing for problems to be solved faster, either by the user or by support agents using remote service tools, increasing uptime.
Accounting	
Xerox® Standard Accounting (Standard)	
<b>Tracking</b>	Copy, Print, Fax, Scan and Email usage
<b>Accounting</b>	<p>Up to 2,497 User Accounts (User ID)</p> <p>Up to 500 General Accounts (Client)</p> <p>Up to 498 Group accounts (Department)</p>
<b>Features</b>	<ul style="list-style-type: none"> <li>• Administrator can manage the feature via the Web User Interface or device control panel in tools.</li> <li>• Administrator has the ability to import or export user accounts, Group Accounts, General Accounts and User limits via an industry standard CSV file.</li> </ul>
Accounting Options – Network Accounting Enablement (Allows central server to manage all accounting)	
	<ul style="list-style-type: none"> <li>• Enhanced network accounting with up to the minute data on how the system is being used</li> <li>• Comprehensive management and enterprise scale tracking and reporting of device usage of copy, print, scan and server fax</li> <li>• Numerous solutions are available through Xerox Alliance Partners. For details visit <a href="http://www.xerox.com">www.xerox.com</a></li> <li>• Security enhancements with the addition of HTTPS protocol support</li> <li>• Device requests account authentication from third party server enabling larger databases of users and accounts</li> <li>• Accept Authentication Login at control panel and pass to third party Networking Account</li> <li>• Interface with third party accounting terminal for accounting user interface</li> </ul>

# Xerox® AltaLink® C8030/C8035/C8045/C8055/C8070 Colour Multifunction Printer

EFI™ Fiery® Integrated Network Server (Optional)			
<b>Processor</b>	AMD® GX-424CC processor, 2.4 GHz, Quad-Core, 2M cache		
<b>Memory (ESS)</b>	2 GB		
<b>System Disk</b>	500 GB HDD		
<b>Page Description Language</b>	PostScript v 3020		
<b>Features</b>	Fiery Command WorkStation capability via a PC or MAC (customer to provide) with Queue Management Job Preview Job Merge Change Job Properties PANTONE® Colour Tables Expert Colour Settings: Profile, Rendering and Simulation Fiery FreeForm – Variable Data capabilities Booklet Maker – booklet wizard to create booklets Print from USB flash drive Secure Erase EFI PrintMe Fiery® VUE Calibration Secure Printing User Authentication Drag and Drop job Management with CWS Importing Jobs		
<b>Connectivity</b>	10Base-T/100Base-TX/1000Base-T Ethernet		
<b>Optional</b>	Fiery Options Bundle (Spot On, Auto Trapping, Hot Folders, Virtual Printers) Network Switch to connect both printer and Fiery Server to Network		
Supplies	Description	Quantity	Part Number
<b>Supplies</b>			
<b>Toner Cartridge (Metered)<sup>5</sup></b>	Black	26,000 pages	006R01509
	Cyan	15,000 pages	006R01512
	Magenta	15,000 pages	006R01511
	Yellow	15,000 pages	006R01510
<b>Toner Cartridge (Sold)<sup>5</sup></b>	Black	26,000 pages	006R01701
	Cyan	15,000 pages	006R01702
	Magenta	15,000 pages	006R01703
	Yellow	15,000 pages	006R01704
<b>Transfer Belt Cleaner</b>	1 Assembly	160,000 pages	001R00613
<b>Second Bias Transfer Roll</b>	1 Assembly	200,000 pages	008R13064
<b>Staple Cartridges</b>	for BR Finisher, Integrated Office Finisher, Office Finisher LX and Convenience Stapler (1 cartridge per carton)	5,000 each cartridge	008R12964
	for BR Booklet Maker (1 cartridge per carton)	5,000 each cartridge	008R13177
	for Office Finisher LX Booklet Maker (8 cartridges per carton)	2,000 each cartridge	008R12897
<b>Staple Refills</b>	for Integrated Office Finisher, Office Finisher LX and Convenience Stapler (3 refills per carton)	5,000 each refill	008R12941
<b>Xerox® Smart Kit<sup>6</sup></b>			
<b>Drum Cartridge<sup>6</sup></b>	1 Cartridge per Colour	125,000	013R00662
<b>Waste Toner Container with Suction Filter<sup>7</sup></b>	1 Cartridge	43,000	008R13061

<sup>1</sup> Maximum volume capacity expected in any one month. Not expected to be sustained on a regular basis.

<sup>2</sup> Expected regular monthly throughput.

<sup>3</sup> XPS option is required to print XPS files.

<sup>4</sup> Paper capacities are based on 20 lb. / 75 gsm stock; capacities will vary with different weight stocks.

<sup>5</sup> Assumptions: Toner cartridge yield is based on 5% area coverage on 8.5 x 11 in. / A4 LEF. Toner yield can vary due to many factors, including but not limited to, image area coverage, image content, media size, run mode, application types, monthly print volumes and image quality set-points.

<sup>6</sup> Average drum yield is based on a run length of 5 pages of 8.5 x 11 in. / A4 LEF pages, with split of 30% colour / 70% black-and-white pages.

<sup>7</sup> Waste Toner Container yield will vary depending on type of image, area coverage % and Job run length.

Return spent imaging supplies through the Xerox Green World Alliance collection/reuse/recycling programme.

For more information, visit [www.xerox.com/about-xerox/recycling](http://www.xerox.com/about-xerox/recycling).

For more information, visit us at [www.xerox.com/office](http://www.xerox.com/office)